


dbx ZonePRO™ 641m

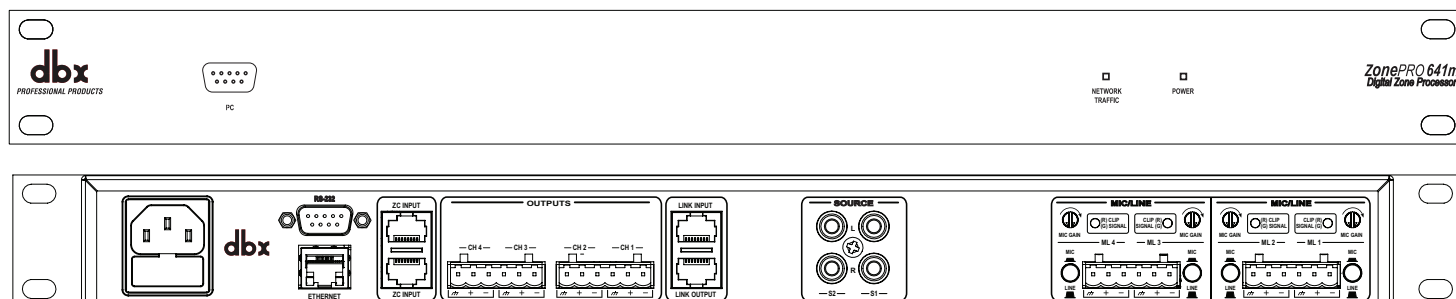

OVERVIEW:

The ZonePRO 641m offers fixed I/O, pre-configured architecture, configurable insert processing and optional duplication of audio channels to another ZonePRO device via a link bus.

The 641m features a total of six inputs and four outputs. Inputs include four balanced mic/line switchable terminal block inputs and two mono-summed pairs of unbalanced RCA inputs. Hardware-controlled microphone gain allows adjustment of microphone gain per channel.

The 641m device has a pre-configured architecture with input processing, a central matrix and output processing. Two input insert positions and one output insert position allow channel-specific insert processing to be configured. AutoWarmth®, a psychoacoustic function that maintains full frequency bandwidth even when the signal level has dropped, is permanently available on each output zone.

A link bus allows duplication of the first six audio channels to another ZonePRO device in applications where additional output zones are required.

The front panel of the 641m features a power status LED, a network traffic LED, and an RS-232 control port.

Additional system control is offered in the form of optional Zone Controllers. This collection of hardware wall-controllers represents a series of simple, elegant user interfaces for functions such as volume, source and preset control.

All ZonePRO devices can be controlled by third party control systems via RS-232 or Ethernet as applicable (see table for further information).

ZonePRO Designer—the configuration, control and monitoring software for the ZonePRO family of devices—offers control of the ZonePRO 641m **via Ethernet or RS-232**. The Configuration Wizard within ZonePRO Designer guides users through the step-by-step configuration process of the 641m.

KEY FEATURES:

- 6 Inputs / 4 Outputs
 - 4 Balanced Mic/Line Inputs
 - 2 Unbalanced, Mono-Summed RCA Input Pairs
- Microphone Gain on Channels 1-4
- Pre-Configured Architecture
- Two Configurable Input Insert Positions
- One Configurable Output Insert Position
- AutoWarmth® per Output Zone
- Link Bus
- Optional ZC Controllers
- Ethernet Control
- Serial Control
- Third Party Control
- Wizard-Driven Configuration



ZonePRO™ 641m

TECHNICAL SPECIFICATIONS:

Front Panel LED Indicators: Network Traffic, Power

Analog Inputs: 6 Total (4) Switchable Mic or Line, (2) Unbalanced, Mono-Summed RCA Input Pairs

Type: Euroblock (Mic/Line), RCA (Source)

Impedance (Euroblock): >50kΩ Balanced, >25kΩ Unbalanced, RF Filtered

Impedance (RCA): >25kΩ Unbalanced, RF Filtered

Max. Input Line Level: +20dBu Mic/Line, +12dBu RCA

CMRR: >40dB, typically >55dB @ 1kHz

Mic Pre Gain: 30 to 60dB

Mic Input Noise (E.I.N.): <-118dBu, 22Hz-22kHz, 150Ω Source Impedance

Mic Phantom Power: +15VDC

Analog Outputs: 4 Total

Type: Electronically Balanced, RF Filtered Euroblock

Impedance: 120Ω Balanced, 60Ω Unbalanced

Max. Output Level: +20dBu

A/D Performance:

Type: dbx Type IV™ Conversion System

Dynamic Range Line: >113dB A-weighted, >110dB unweighted

Type IV Dynamic Range: >119dB A-weighted, 22kHz BW: >117dB, unweighted, 22kHz BW

Sample Rate: 48kHz

D/A Performance:

Dynamic Range: 112dB A-weighted, 109dB unweighted, 22kHz BW

System Performance:

Dynamic Range: >109dB A-weighted, >106dB unweighted, 22kHz BW

THD+N: 0.003% typical at +4dBu, 1kHz, 0dB gain

Frequency Response: 20Hz – 20kHz, +/- 0.5dB

Interchannel Crosstalk: >80dB typical

Crosstalk input to output: >80dB

Propagation Delay: 0.6 msec

Operating voltage: 100 VAC, 50/60Hz, 120 VAC, 60Hz, 230VAC 50/60Hz

Power Requirements: 29 Watts

BTU Rating: <92.13 BTU

Physical Dimensions:

Weight: 6.8 lbs / 3.1 kg Shipping Weight 8.8 lbs / 4 kg

Dimensions (H(U) x W x D): 1.75" (1U) x 19" x 7.75" (45mm x 483mm x 197mm)

Safety Agency Certifications: UL 60065, IEC 60065, E 60065, EN 55013

	Inputs	Outputs	Front Panel Control	Mic Preamps	S/PDIF	Ethernet	Mix Functionality	ANC*
1260m	12	6	✓	6	✓	✓	✓	✓
1260	12	6	✓	2	✓	✓	✓	
1261m	12	6		6	✓	✓	✓	✓
1261	12	6		2	✓	✓	✓	
640m	6	4	✓	4		✓	✓	✓
640	6	4	✓	2				
641m	6	4		4		✓	✓	✓
641	6	4		2				

*Ambient Noise Compensation